

# Harper Carpet Replacement - 3rd Floor

PROJECT NUMBER: DEW-110




October 15, 2018

South Carolina Department of Employment and Workforce  
C. Lem Harper Building  
631 Hampton Street, Columbia, SC 29201

# DEW-110, Harper Carpet Replacement

- 1) Contractor must scrape the existing glue off of the floor and remove it.
- 2) Contractor must lift cubicles in place and not disassemble them.
- 3) Contractor is responsible for moving furniture.
- 4) All work must be done after normal SCDEW business hours (7:00 AM to 5:30 PM).
- 5) Contractor is to remove the existing carpet/cove base and haul it away.
- 6) Contractor to replace carpet on the 3rd floor of the C. Lem Harper Building only where existing carpet is located. Do not place carpet any areas that do not have existing carpet.
- 7) Contractor to provide total yards and cost per square yard with bid as a unit price.
- 8) Contractor to use bid form in the project manual.
- 9) Carpet Specification: Mohawk Group, BT285 Sector Tile, 7688 Ore, 24 inch X 24 inch squares. or Equal. Must be exact match.
- 10) Code Base Specification: Johnsonite as specified of Equal. Must be exact match.

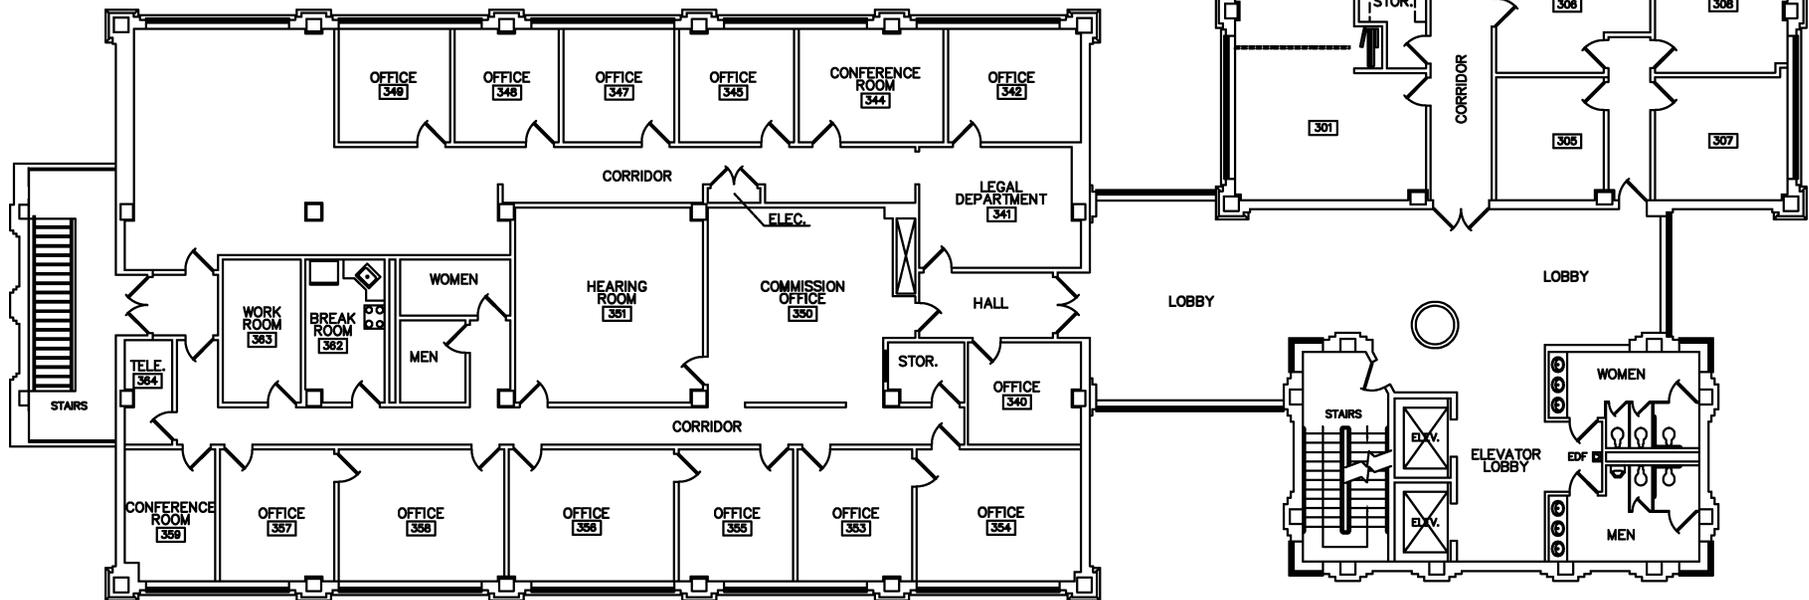

C. LEM HARPER BUILDING – THIRD FLOOR



**DESIGN**

Tufted Pile Weight:	14.0 oz. per sq. yd. (474 g/m <sup>2</sup> )
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Level Patterned Loop
Gauge:	1/12 (49.00 rows per 10 cm)
Density:	5,929
Weight Density:	83,012
Stitches Per Inch:	10.3 (40.55 per 10 cm)
Finished Pile Thickness:	.085" (2.16 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Monolithic, Vertical Ashlar, Quarter Turn, Brick Ashlar, Multi Directional
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

**SUSTAINABILITY**

IAQ Green Label Plus:	CRI Green Label Plus GLP1098
Pre-Consumer Recycled Content:	48%
NSF 140:	EcoFlex ICT - NSF 140 Gold
Declare Label:	Declared

**PERFORMANCE**

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

**SERVICE**

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Limited Stain Warranty, Lifetime Static
-------------	--



7238  
Pumice  
Quickship Available



7358  
Breccia



7559  
Opal  
Quickship Available



7568  
Marble  
Quickship Available



7656  
Gabbro



7688  
Ore  
Quickship Available



7728  
Chert  
Quickship Available



7858  
Feldspar



7879  
Basalt  
Quickship Available



7927  
Shale  
Quickship Available



7948  
Granite  
Quickship Available



# JOHNSONITE RESILIENT WALL BASE

## Traditional Wall Base

## Product Specification

### 1. PROPRIETARY PRODUCT/MANUFACTURER

#### 1.1. Proprietary Product: Thermoplastic Wall Base

#### 1.2. Manufacturer:

Tarkett	Phone: (800) 899-8916
30000 Aurora Rd.	(440) 543-8916
Solon, Ohio 44139	Tech: Ext 9297
Web: www.tarketta.com	Samples: Ext 9299
E-mail: info@johnsonite.com	

#### 1.3. Proprietary Product Description:

1.3.1. **Construction:** Johnsonite Traditional Wall Base is manufactured from a proprietary rubber and vinyl formulation designed specifically to meet the performance and dimensional requirements of ASTM F-1861, Type TV (Thermoplastic Vinyl) and TP (Thermoplastic Rubber), Group 1 (solid), Style A and B, Standard Specification for Resilient Wall Base.

#### 1.3.2. Styles/Physical Characteristics:

##### Rubber Wall Base

- **Traditional:** DC-XX with toe (coved) or DCT-XX for toeless (straight), 0.125" (3.17 mm) thickness, 2-1/2" (6.35 cm), 4" (10.16 cm), 4 1/2" (11.4 cm) or 6" (15.24 cm) height

Available in 4' (1.22 m) straight lengths and 120' (36.58 m) coiled lengths. The 6" (15.24 cm) high profile available in 4' (1.22 m) straight lengths and 100' (30.48 m) coiled lengths

- **Wall Art:** WA-XX w/toe (coved), 0.125" (3.17 mm) thickness, 4" (10.16 cm) height

Available in 4' (1.22 m) straight lengths only

- **Inside and Outside Corners** available with 4" (10.16 cm) returns packaged 25 per carton, add LIC (Inside corners) or LOC (Outside corners)

##### Vinyl Wall Base

- **Traditional:** CB-XX with toe (coved) or CBT-XX toeless (straight), 0.125" (3.17 mm) or 0.080" thickness, 2-1/2" (6.35 cm), 4" (10.16 cm), or 6" (15.24 cm) height

Cartons size: Available in 4' (1.22 m) straight lengths and 120' (36.58 m) coiled lengths. The 6" (15.24 cm) high profile available in 4' (1.22 m) straight lengths and 100' (30.48 m) coiled lengths

- **Inside and Outside Corners** available with 4" (10.16 cm) returns packaged 25 per carton, add LIC (Inside corners) or LOC (Outside corners)

### 2. PRODUCT PERFORMANCE AND TECHNICAL DATA

2.1. Meets or exceeds the performance requirements for resistance to heat/light aging, chemicals, and dimensional stability when tested to the methods, as described, in ASTM F-1861.

2.2. **Flexibility:** Will not crack, break, or show any signs of fatigue when bent around a 1/4" (6.4 mm) diameter cylinder.

2.3. **Chemical resistance (ASTM F 925):** Passes – 5% acetic acid, 70% isopropyl alcohol, mineral oil, 5% sodium hydroxide solution, 5% hydrochloric acid solution, 5% sulfuric acid solution, 5% household ammonia solution, and 5.25% household bleach solution

2.4. **Resistance to light (ASTM F 1515):** ΔE < 8

#### 2.5. Fire Resistance:

##### Vinyl Wall Base

ASTM E 648 (NFPA 253): Critical Radiant Flux – Class I

ASTM E 84/NFPA 255 (Flame/Smoke) – Class B, < 450

##### Rubber Wall Base

ASTM E 648 (NFPA 253): Critical Radiant Flux – Class I

ASTM E 84/NFPA 255 (Flame/Smoke) – Class C, < 450

### 3. INSTALLATION

3.1. See Johnsonite wall base installation instructions for complete details.

#### 3.2. Adhesives:

- **Tarkett 960 Cove Base Adhesive (Porous surfaces):**

Application: 1/8" x 1/8" x 1/8" square notched trowel

Approximate coverage:

2 1/2" high – 300 to 350 linear feet/gallon

4" high – 200 to 250 linear feet/gallon

6" high – 100 to 150 linear feet/gallon

- **Tarkett 946 Premium Contact Adhesive (Non-porous surfaces)**

Application: Brush or roller

Approximate coverage:

1 kg Unit (0.95 Qt) – 24 to 36 sq. ft.

6 kg Unit (1.44 Gal.) – 144 to 215 sq. ft.

### 4. AVAILABILITY AND COST

Available through authorized Tarkett distributors nationwide.

### 5. WARRANTY

Limited 2 year warranty. For complete details, contact Tarkett or an authorized Tarkett distributor.



# JOHNSONITE RESILIENT WALL BASE

## Traditional Wall Base

## Product Specification

---

### 6. MAINTENANCE

72 hours after installation is completed, initial maintenance procedures must be implemented in accordance with manufacturer's requirements. Refer to Johnsonite Resilient Wall Base Installation & Maintenance Instructions for complete maintenance details.

### 7. TECHNICAL SERVICES

**Samples:** Submittal samples for verification and approval available upon request from Tarkett. Samples shall be submitted in compliance with the requirements of the contract documents. Accepted and approved samples shall constitute the standard materials which represent materials installed on the project.

For current Installation and Maintenance Instructions, Product Specifications, and other technical data, visit us on the web at [www.tarketta.com](http://www.tarketta.com) or contact Tarkett at 1-800-899-8916.

# DEW BID FORM

## SC Department of Employment and Workforce

(Bidder may not qualify their quote or alter the quote requirements.)

---

Project Number: DEW-110

Project Name: Harper Carpet Replacement

Bid Time: Tuesday, October 25, 2018, 2:00 PM, email: [gholmstrom@dew.sc.gov](mailto:gholmstrom@dew.sc.gov), , or deliver to 1550 Gadsden St., Columbia, SC 29202, Suite 623

---

Bid Submitted By: \_\_\_\_\_  
(Bidder Name)

Bidder agrees that this bid may not be revoked or withdrawn after the opening of bids unless mutually agreed upon by Bidder and DEW, and shall remain open for acceptance for a period of **60** Days following the Quote Date, or for such longer period of time that Bidder may agree to in writing upon request of the Owner.

BID Amount:			
Addendum (List # of addendums and cost per addendum):			
Unit Pricing:	Item _____	QTY _____	Square Yards Unit Bid Price _____ \$/Sq Yd
Total Bid:			

Bidder Address: \_\_\_\_\_

Representative Name: \_\_\_\_\_

Rep's Phone & E-Mail: \_\_\_\_\_

License Number: \_\_\_\_\_

I acknowledge receipt and acceptance of the following numbered Addendum(s): \_\_\_\_\_

Rep's Signature and Date: \_\_\_\_\_